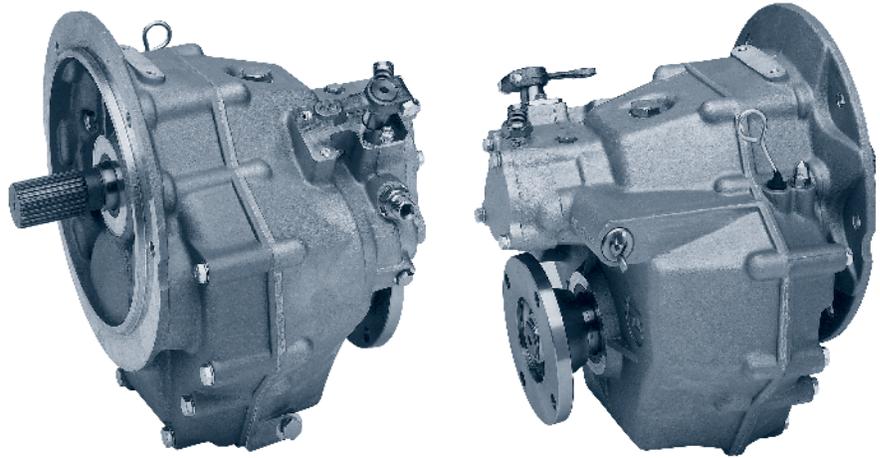


MAXIMUM 112 KW (150 HP) @ 3000 RPM [PLEASURE CRAFT DUTY]**STANDARD EQUIPMENT****MG-5005 A**

8° down angle on output shaft
 Aluminum alloy housing
 Hydraulically operated, multiple-disc clutches
 Oil type SAE 20/30

**OPTIONS**

6.5" Dual stage coupling (Centa CFDS22)
 7.5" Dual stage coupling (Centa CFDS22)
 Cable bracket
 Heat exchanger kit
 Propeller shaft flange
 SAE 4 bell housing (H=12.5 mm)
 Trolling valve kit-field adaptation
 Trolling valve-factory fitted
 Weight (dry weight - alloy housing)

MG-5005 A**x****x****x****x****x****x****x****x****25 kg**

Contact Twin Disc for Survey Society Approvals and Classifications.

Specifications subject to change without prior notice in the interest of continual product improvement.

INPUT RATINGS – KILOWATTS (KW) (HORSEPOWER [HP])*

Reduction Ratios	Pleasure Craft Duty	Intermediate Duty	Continuous Duty	Maximum rated input speed
	@3000 RPM	@3000 RPM	@2800 RPM	
:1				4500 rpm
1.54	112 kW (150 hp)	104 kW (140 hp)	63 kW (85 hp)	
2.00	93 kW (125 hp)	87 kW (117 hp)	63 kW (85 hp)	
2.47	67 kW (90 hp)	63 kW (84 hp)	48 kW (64 hp)	

* Ratings shown for use with standard right hand rotation engines.

